


IN-LINE RECTANGULAR DUCT FANS ILB / ILT Series



MOUNTING ACCESSORIES




IBE
Electric heater
For more information see Heating range.



IBW
Hot water coil
Casing manufactured from galvanised sheet steel.
Copper tubes and aluminium fins.
Supplied with standard rectangular flanges.
Can be fitted in horizontal or vertical position.
Maximum water pressure 16bar.
Maximum water temperature: 120°C.
As accessory: Filtration box and pressure switch to reduce and control the coil clogging.

Model	Air				Airflow (m ³ /h)	Water		Weight (kg)	Duct coil (Inch)	Accessories		
	Power		Δ T air			Pressure (kPa)*	Volume (l/h1)			Coil mounting kit		Thermostat (***)
	KW1)	KW2)	(°C)*	(°C)**						Model	Setting	
IBW-200-2	10,1	5,9	25,9	15,1	1.152	1,2	435	6	3/4"	PWW-SE1	1	THE 16/4 A
IBW-200-4	17,6	11,5	45,1	29,4	1.152	3	756	7	3/4"	PWW-SE1	1	THE 16/4 A
IBW-225-2	16,5	10,2	27	16,8	1.800	2,2	709	7	3/4"	PWW-SE1	1	THE 16/4 A
IBW-225-4	28,3	18,9	46,5	31,1	1.800	5,9	1.213	10	3/4"	PWW-SE1	2	THE 16/4 A
IBW-250-2	19,8	12,3	27	16,8	2.160	2,2	853	8	3/4"	PWW-SE1	1	THE 16/4 A
IBW-250-4	33,6	22,3	46	30,5	2.160	4,8	1.443	11	1"	PWW-SE3	2	THE 16/4 A
IBW-285-2	24,4	15,6	27,8	17,8	2.592	3,6	1.051	9	3/4"	PWW-SE1	2	THE 16/4 A
IBW-285-4	41	27,6	46,8	31,5	2.592	7,8	1.760	12	1"	PWW-SE3	3	THE 16/4 A
IBW-315-2	28,4	18,2	27,8	17,8	3.024	3,6	1.228	10	3/4"	PWW-SE1	2	THE 16/4 A
IBW-315-4	48	32,4	46,9	31,7	3.024	8,3	2.063	13	1"	PWW-SE3	3	THE 16/4 A
IBW-355-2	42,2	26,5	31	19,4	4.032	2,9	1.821	14	1"	PWW-SE3	3	THE 16/4 A
IBW-355-3	57,8	36,5	42,4	26,8	4.032	2,4	2.476	16	1"	PWW-SE3	3	THE 16/4 A
IBW-400-2	62,2	40,2	31,9	20,6	5.760	4,9	2.685	20	1"	PWW-SE3	3	THE 16/4 A
IBW-400-4	84,5	54,5	43,4	28	5.760	3,7	3.628	25	1"	-	-	-
IBW-450-2	79,8	52,7	32,8	21,6	7.200	8,7	3.424	23	1"	-	-	-
IBW-450-4	122	82,6	42	28	7.200	6,7	5.370	28,2	1"	-	-	-

Outdoor temperature 0°C and water temperature: *80/60°C - **60/40°C *** When the motor pump is not connected directly to the hot-water boiler.

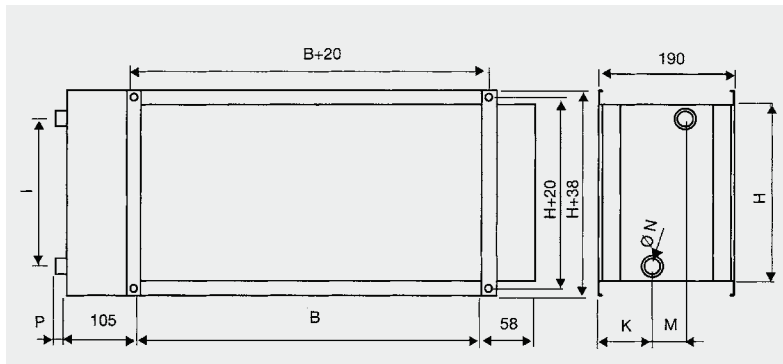

Model	B	H	I	K	M	P
IBW-200	400	200	150	84	43	28
IBW-225	500	250	200	62	65	28
IBW-250	500	300	250	84	43	28
IBW-285	600	300	250	62	65	35
IBW-315	600	350	230	84	43	28
IBW-355	700	400	350	66	58	35
IBW-400	800	500	450	82	47	35
IBW-450	1000	500	450	66	58	35