


JKB / JKT

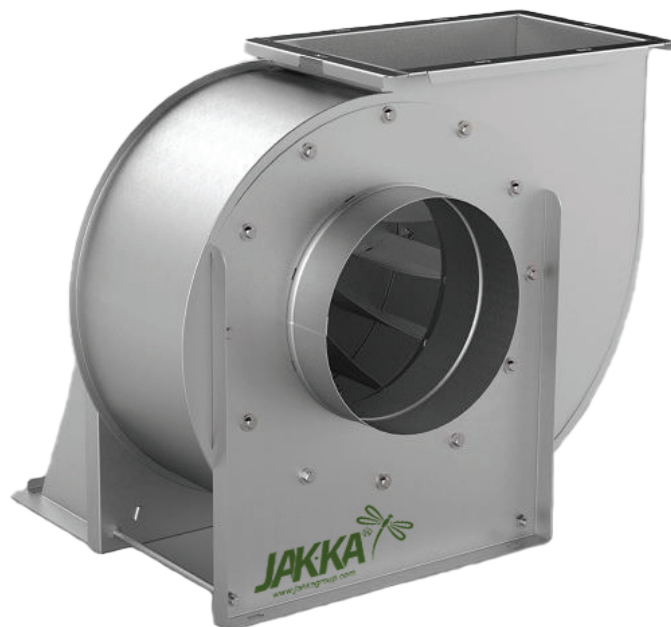

Materijal / Material

Pocinkovan čelik
Galvanized steel

Pakovanje / Package

1 kom
1 pcs

Klasa hermetičnosti motora /
Motor ingress protection class

IP56

Klasa izolacije motora /
Motor isolation class

F

Napajanje / Power supply

230V / 50Hz - 400V / 50Hz

Centrifugalni ventilator sa dovodom vazduha sa jedne strane. Napravljen od pocinkovanog lima, sa napred zakrivljenim radnim kolom. Koriste se za dovod ili odvod vazduha u kuhinjama, restoranima, hotelima, farbarama itd.

Centrifugal fan for with air supply from one side. With strong construction made of galvanized steel sheet. High-performance galvanized impeller with forward curved blades. The fans are suitable for supplying or exhausting air, they are used in professional kitchens, restaurants, hotels, workshops, car painting cabinets, etc.





TEHNIČKA SPECIFIKACIJA TECHNICAL SPECIFICATION



MONOFAZNI

Model	Napajanje	Snaga		Jačina struje (A)	Protok [m³/h]	Broj obrtaja [rpm]	Prirubnica Ø [mm]	Regulacija
	[V/50Hz]	[kW]	[HP]					
Četvoropolni								
JKB/4-200/050	220	0.37	0.5	2,70	2500	1400	200	REM 5
JKB/4-250/100		0.75	1	4,90	5000		250	REM 10
JKB/4-250/150		1.1	1.5	10,00	6000		250	REM 10
JKB/4-300/200		1.5	2	10,00	8000		300	ON-OFF


TROFAZNI

Model	Napajanje [V/50Hz]	Snaga		Jačina struje (A)	Protok [m³/h]	Broj obrtaja [rpm]	Prirubnica Ø [mm]	Regulacija
		[kW]	[HP]					
Četvoropolni								
JKT/4-300/200	230/400	1.5	2	6/3,5	8000	1400	300	Parker AC10 10G-42-0040-BN
JKT/4-350/300		2.2	3	8,4/4,89	9000		340	Parker AC10 10G-42-0065-BN
JKT/4-350/400		3	5.5	12,4/7,2	11.000		340	Parker AC10 10G-43-0080-BN


TEHNIČKA SPECIFIKACIJA TECHNICAL SPECIFICATION

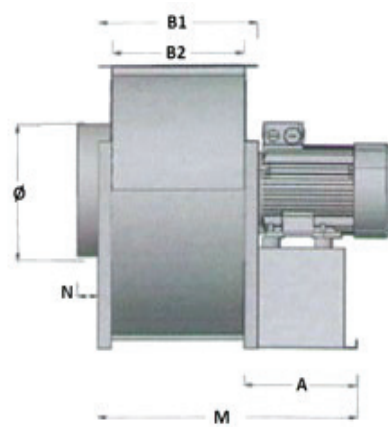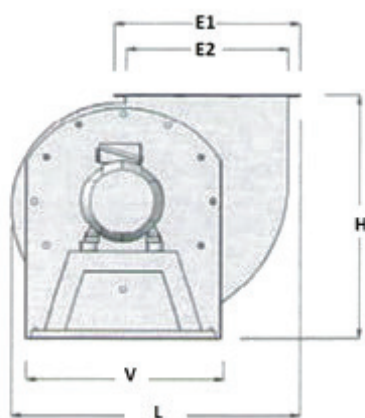


Model	Dimenzije (mm)								
	H	L	M	V	E1*B1	E2*B2	fi	N	A
JKB/4-200/050	455,5	540	430	375	298*260	235*200	200	55	200
JKB/4-250/100	537	625	460	420	395*270	335*210	250	55	220
JKB/4-250/150	537	625	460	420	395*270	335*210	250	55	220
JKB/4-300/200	630	740	585	510	420*350	360*290	300	55	270
JKT/4-300/200	630	740	585	510	420*350	360*290	300	55	270
JKT/4-350/300	715	790	690	513	485*390	423*330	350	80	280
JKT/4-350/400	715	790	690	513	485*390	423*330	350	80	280




RD0




RD90




RD270



LG0



LG90



LG270

