

April
2025

JAKKA fleksibilna CREVA ISO 4.0 M0



JAKKA®

www.jakkagroup.com

Podaci u katalogu su informativnog karaktera. Jakka Group zadržava pravo promene cena i podataka bez prethodne najave. Za više informacija, pre konačne kupovine, kontaktirajte našu prodajnu službu.



ISO - JAKKA 4.0 M0

Materijal / Material

Al + Al laminate
Al + Al laminate

Opseg temperature / Temperature range

-30 °C / 250 °C

Oplata / Jacket

Al + Al laminate
Al + Al laminate

Broj slojeva / No. of layers

4

Brzina strujanja vazduha / Air velocity

Max 25,4 m/s

Radni pritisak / Operating pressure

2500 Pa

Prečnici u ponudi / Diameter range

Ø 102 mm - Ø 508 mm

Dužina creva / Standard length

10 m

Klasa gorivosti / Flame retardant

M0

Creva u kutiji / Air ducts in box

1 kom/pc

Vatrootporno
Fireproof

Izolovano
Insulated




Creva namenjena za sredine niskog i srednjeg pritiska.
Izolacija od staklene vune, debljine 25 mm i gustine
16 kg/m³. Mogućnost razvlačenja, uvrtanja i gužvanja.

*Air ducts Intended for medium and low pressure
environment. Insulation made of glass wool. The
thickness of glass wool is 25mm. The density
of glass wool is 16 kg/m³. It has features of being
able to be stretches twisted and compressed.*

NAPOMENA/ NOTICE

- Creva ne oslobađaju otrovne gasove prilikom požara.
Kontaktirajte nas za više informacija.
- Air ducts does not cause poisonous gases release during fire.
Call us for more information.

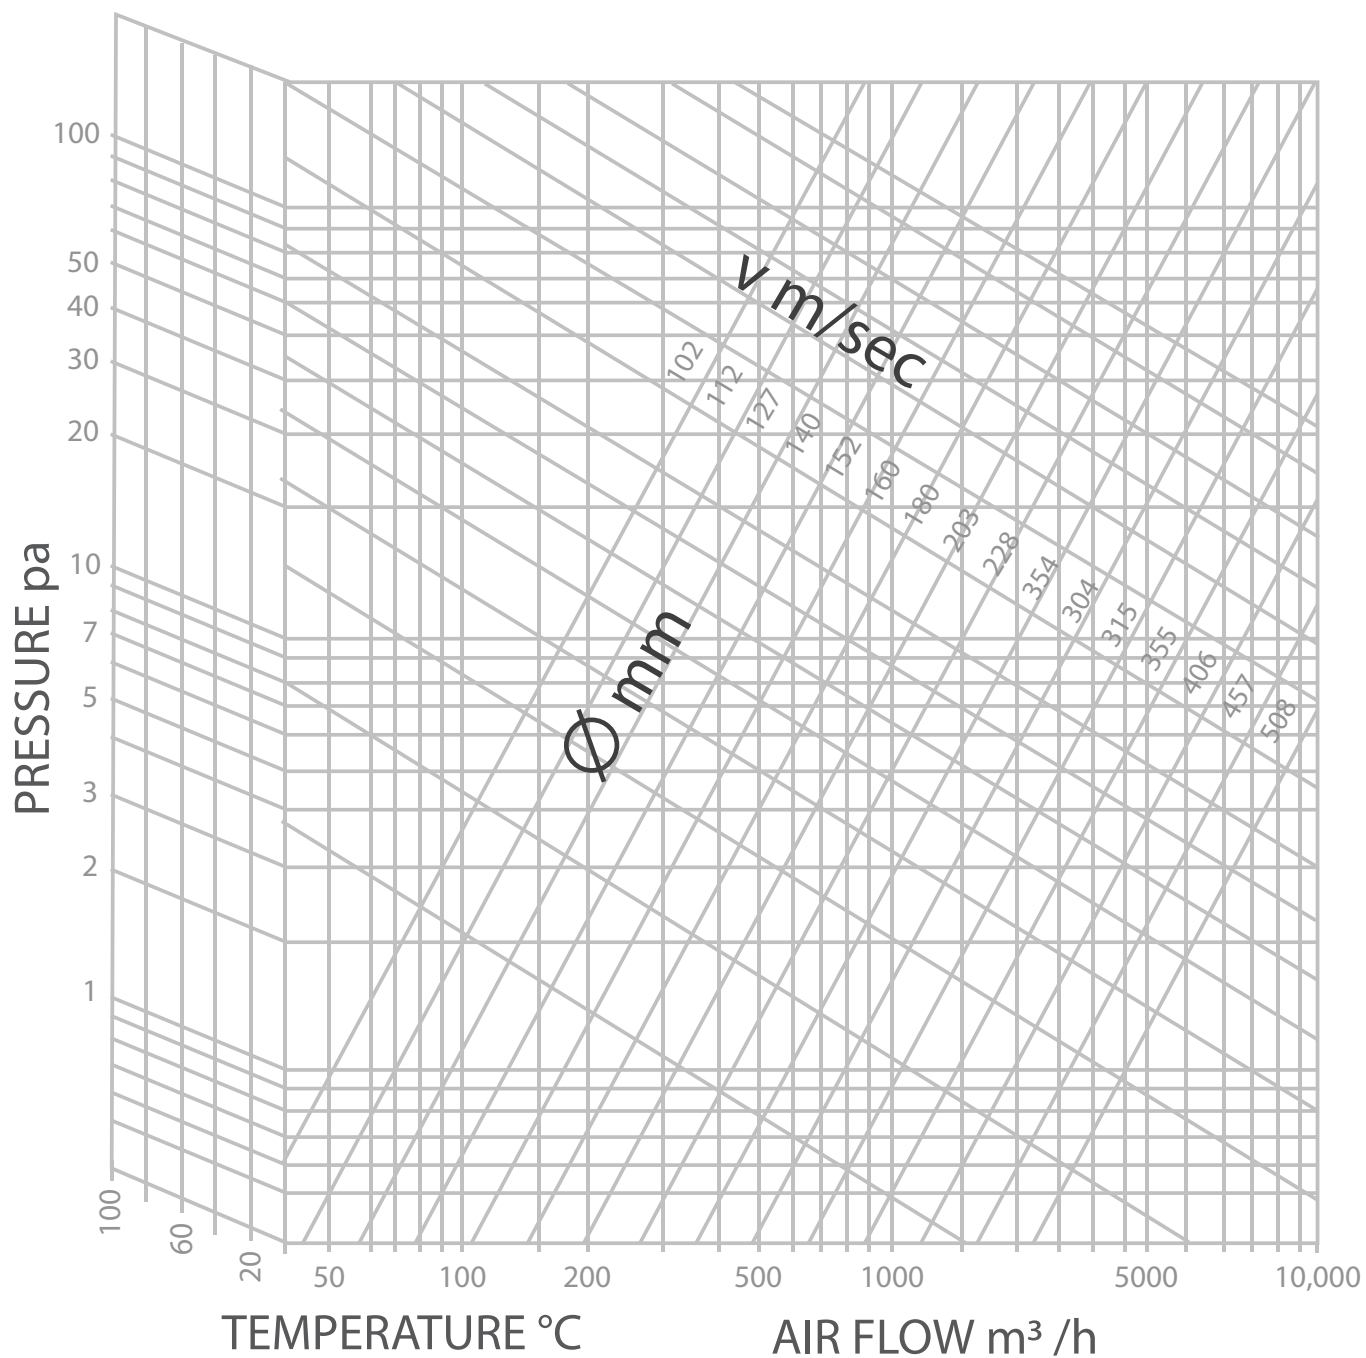

2025



JAK-KA®

www.jakkagroup.com

**Bulevar Zorana Đinđića 80,
11070 NOVI BEOGRAD**

+381 11 2600 901

+381 11 2600 906

jakkagroup@jakkagroup.com

www.jakkagroup.com